




TWIST-OFF JAR CAPS ANALYSIS CERTIFICATE

TECHNICAL SPECIFICATIONS

CONTROLLED PROPERTIES	STANDARD REQUIREMENTS		MEASURED VALUE	TEST RESULT
TYPE OF TIN	ST		ST	Passed
TIN GAUGE / THICKNESS	0,15±0,1 mm		0,155 mm	Passed
TIN HARDNESS	TH 550 TH 620		TH 550	Passed
CAP DIMENSIONS	OUTSIDE DIAMETER	85,20±0,20 mm	85 mm	Passed
	HEIGHT	10,6±0,20 mm	10,60 mm	Passed
USED MATERIALS	INSIDE LACQUER	Poliester	Poliester	Passed
	OUTSIDE LACQUER	Poliester	Poliester	Passed
	PVC :	PVC	PVC	Passed
CAP'S INSIDE-OUTSIDE PHYSICAL STATE OF LACQUER	Pressed caps shouldn't have decrement or scratching.		There aren't any decrements/ scratches.	Passed
CAP'S INSIDE-OUTSIDE LACQUER CORROSION	%20 CuSO4 Corrosion Test		There isn't any corrosion.	Passed
				Passed
SPECIFICATIONS OF SEALING	MATERIAL	PVC	PVC	Passed
	WEIGHT	1000±100 mg	1050 mg	Passed
VACUUM TEST	Hot filling is done at 80-90 °C and impermeability is checked.		There isn't any impermeability.	Passed

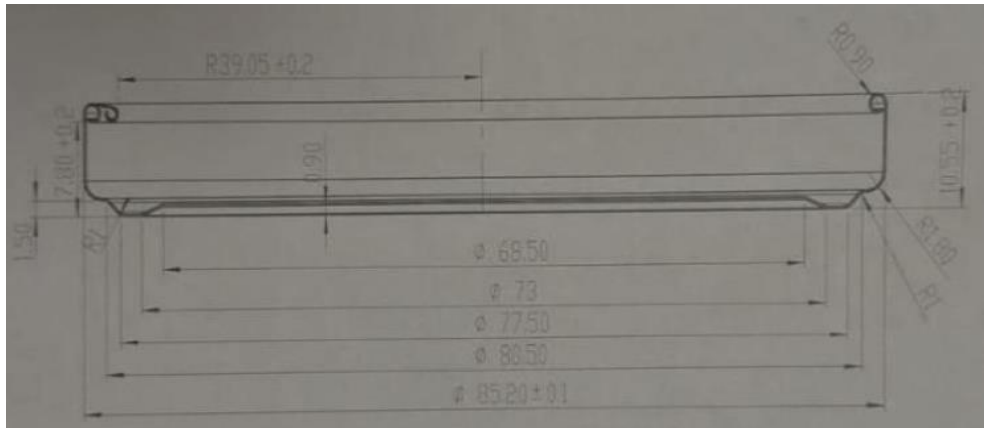

Form No: KK-FR04/P01 Yürürlük Tarihi: 30.07.2023 Rev. No : 00 Rev. Tarihi : .

KALİTE KONTROL ŞEFİ

ESİN ARSLAN

E. Arslan